


EC-UU004-6-PVC-GY

U/UTP 4 , .6, , PVC, , 305

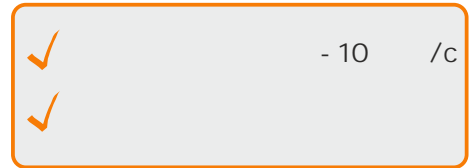

6 10 /c.


EC-UU004-6-PVC-GY

4

6

().

305

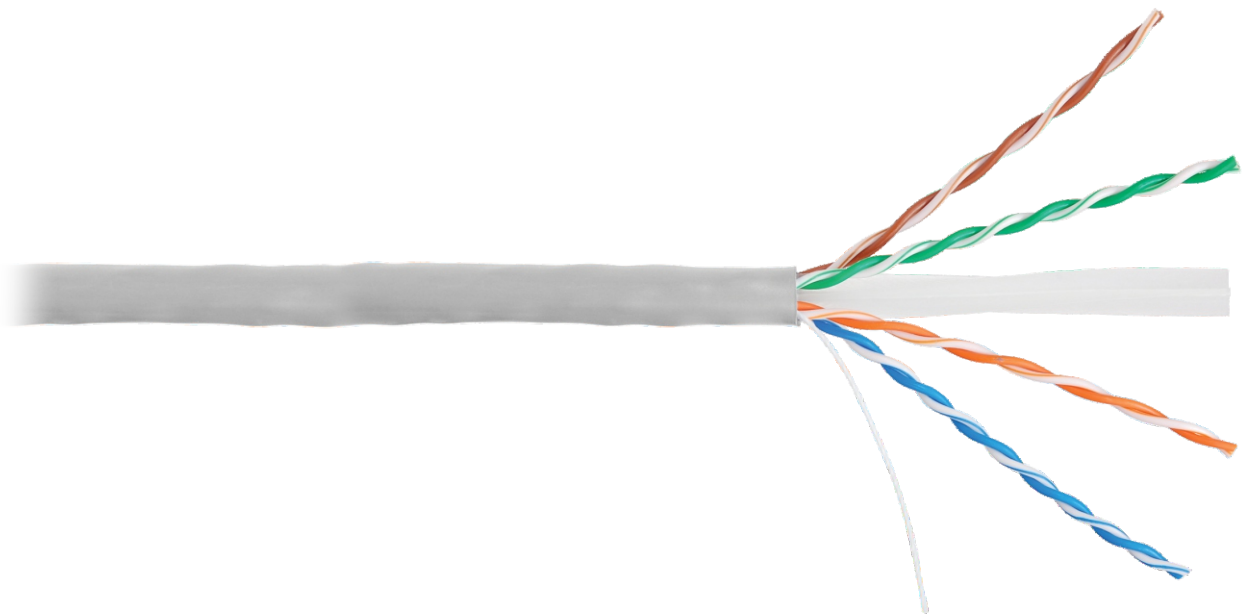


Оболочка из поливинилхлорида

Сердечник-сепаратор

Медные проводники

Изоляция жил из HDPE

Разрывная нить



NETLAN EC-UU004-6-PVC-GY U/UTP SOLID ETHERNET LAN CABLE 4P CATEGORY 6 PVC (Hr(B))



305

	EC-UU004-6-PVC-GY
	6
	250
	U/UTP
	0,505 ± 0,01
	(HDPE)
	0,2 ± 0,02
	0,92 ± 0,03
	(PVC)
	()
	0,5 ± 0,01
	5,8 ± 0,2
	-
	35,5 ± 0,5
	8-
	4-
	80
	100 ± 15
	93
	305
	: ISO/IEC 11801, EN 50173 TIA/EIA-568
	10BASE-T, 100BASE-TX, 100BASE-T4, 1000BASE-T, 10GBASE-T, ATM-25, ATM-51, ATM-155, 100VG-AnyLan, TR-4, TR-16 Active, TR-16 Passive
	-20 +60. 0 +50. -20 +60
	-
	1

EC-UU004-6-PVC-GY	6	4	U/UTP	, PVC		305	0,033600	11,520